



灵智银狐

# 无线双模三键侧滚轮鼠标说明书


Wireless dual-mode three-button side roller mouse manual



2.4G

蓝牙3.0+蓝牙5.2+2.4G锂电池充电无线鼠标

Bluetooth 3.0+Bluetooth 5.2+2.4G lithium battery charging wireless mouse

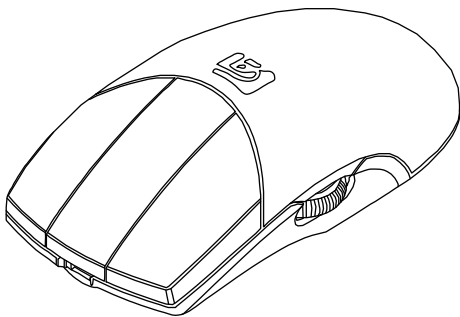

东莞市炫硕电子有限公司

网址: <http://www.hao1885.com>

地址: 东莞市厚街镇湖景大道57号



## 一、操作说明 Operating Instructions

### 1. 2.4G接收器连接模式

鼠标出厂默认连接方式为2.4G模式，拔出鼠标底部储存的USB接收器，插入计算机的USB接口，等候系统安装驱动，观察右下角提示操作，安装完成后重启电脑，按鼠标任意键即可使用。

### 2. 蓝牙1连接

按左中右任意键唤醒鼠标，短按鼠标底部reset键一次，鼠标底部出口蓝色提示灯慢速闪烁，此时切换为蓝牙1模式。长按3秒reset键，此时蓝色提示灯快速闪烁，进入蓝牙配对模式。在Windows系统中，右键点击屏幕右下角工具栏中的蓝牙图标，选择添加蓝牙设备，搜索蓝牙鼠标键盘音频，在Windows 7及以前的系统中找到LZYH-MOUSE 3.0连接。在Windows 8及以后的系统中找到LZYH-MOUSE 5.2连接。

### 3. 蓝牙2连接

按左中右任意键唤醒鼠标，短按鼠标底部reset键二次，鼠标底部出口黄色提示灯慢速闪烁，此时切换为蓝牙2模式，长按3秒reset键，此时黄色提示灯快速闪烁，进入蓝牙配对模式。链接方法同蓝牙1。

说明：蓝牙1和蓝牙2模式没有区别，只是方便在多台计算机或者平板ipad上使用。

备注：手机和平板ipad连接

1. ios系统需要更新到13版本后，在设置中打开蓝牙功能。

2. 系统设置→辅助功能→触控→辅助触控→打开。

3. 设备→蓝牙设备→搜索蓝牙LZYH-MOUSE5.2或者LZYH-MOUSE3.0→单击设备名称，输入PIN码0000完成配对，即可使用。

### 1. 2.4G Receiver Connection Mode

The factory default link mode of the mouse is 2.4G mode. Remove the USB receiver at the bottom of the mouse's USB storage compartment, insert the USB interface of the computer, wait for the system to install the driver, observe the prompt at lower right corner for instructions. After the installation is completed, restart computer. Click any key with the mouse to use it.

### 2. Bluetooth 1 Connection

Press any of the left, middle or right mouse buttons to wake up the mouse. Short press the "reset" button at the bottom of the mouse once, and the blue indicator light at the bottom of the mouse flashes slowly. At this time, switch to Bluetooth 1 mode. Long press the "reset" button for 3 seconds. At this time, the blue indicator light flashes quickly and enters Bluetooth pairing mode. In the Windows system, right-click the Bluetooth icon in the lower right corner of the screen toolbar, and select add Bluetooth device, search for Bluetooth mouse and keyboard audio, find the LZYH-MOUSE3.0 connection in Windows 7 and earlier versions of the system, and find the LZYH-MOUSE5.2 connection in Windows 8 and later systems.

### 3. Bluetooth 2 Connection

Press any of the left, middle or right mouse buttons to wake up the mouse. Short press the "reset" button at the bottom of the mouse twice, and the yellow indicator light at the bottom of the mouse flashes slowly. At this time, switch to Bluetooth 2 mode. Long press the "reset" button for 3 seconds. At this time, the yellow indicator light flashes quickly and enters Bluetooth pairing mode. The linking method is the same as Bluetooth 1. Explanation: Bluetooth 1 and Bluetooth 2 are not different. It is merely for the convenience of using on multiple computers or the iPad.

Note: Mobile phone and tablet iPad connection

1: After the iOS system needs to be updated to version 13, turn on the Bluetooth function in the settings.

2: System settings→Assistant functions→Touch→Assistant touch→Open.

3: Device→Bluetooth device→Search for Bluetooth LZYH-MOUSE5.2 or LZYH-MOUSE3.0→Click the device name and enter the PIN code "0000" to complete the pairing. It can be used now.

## 二、外观接口开关说明 Description of the appearance interface switch

此处为DPI调速按钮，DPI可在800、1200和1600之间循环切换。


DPI speed control, you can switch DPI to 800、1200 and 1600.

2.4G 无线接收器

2.4G Wireless receiver

2.4G、蓝牙1和蓝牙2切换键


2.4G、Bluetooth 1 and Bluetooth 2 Switch button.

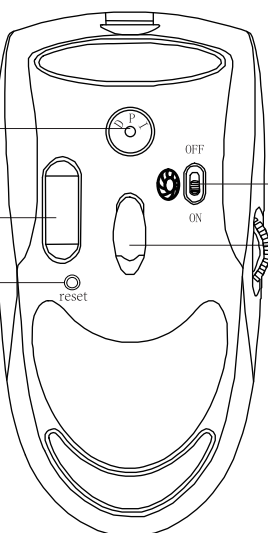

电源(Power): 开(ON) 关(OFF)

红色闪烁灯: 2.4G  
蓝色闪烁灯: 蓝牙 1  
黄色闪烁灯: 蓝牙 2  
绿色闪烁灯: 鼠标工作灯  
Red flashing light: 2.4G  
Blue flashing light: Bluetooth 1  
Yellow flashing light: Bluetooth 2  
Green flashing light: mouse work light

蓝色充电指示灯，充电时此灯亮起，充满电此灯熄灭  
Recharge indicator, light on while recharging and turn off after recharge complete



充电插口类型: TYPE-C  
电压: 5V 电流: 0.5A  
Charging port type: TYPE-C  
Voltage: 5V Electric: 0.5A

低电量提示灯，当鼠标电量低于10%时红灯闪烁提示  
Low power indicator lamp  
When the battery power is less than 10%. Red light flicker

## 三、产品参数 Product Parameters

电池容量:	500mAh	电池类型:	锂电池	充电线长:	1m
无线传输距离:	10m	鼠标重量:	68g	鼠标尺寸:	长120mm×宽62mm×高38mm
Battery capacity:	500mAh	Battery type:	Lithium battery	Length of the charging cable:	1m
Wireless transmission:	10m	Mouse weight:	68g	Mouse size:	L120mm×W62mm×H38mm

## 四、充电说明 Charging Instructions

建议使用电脑usb接口充电，也可以接手机充电头或者充电宝。充电时充电指示灯为蓝色，充满灯熄灭。充电时间大约2小时。较长时间不使用时，每隔30天给鼠标充一次电。

It is recommended to charge using the computer USB interface. It can also be connected a mobile phone charger or a portable power bank. The charging indicator light is blue when charging. Filled with extinguished lights. The charging time approximately two hours. When the mouse is not used for a long time, recharge it every 30 days.

## 五、使用说明 Instructions for Use

- 鼠标内置电源管理芯片，自动节电（2分钟不用时）和自动关机（8分钟不用时），可按任意键唤醒。
- 蓝牙5.2只支持Win8/Win10/Win11/Mac/Android5.1以上系统，支持IOS13以上版本。
- Win7系统请使用蓝牙3.0，蓝牙3.0和5.2区别是5.2传输距离远，功耗小，3.0兼容范围广泛。
- 当鼠标滚轮处红色闪烁提示灯亮起或者鼠标反应慢时请及时充电。
- 请勿将鼠标浸入任何液体中，或暴露于炎热、潮湿的环境中（工作温度-10至40摄氏度）。
- 请勿拆卸、改装或者维修本产品（可能导致辐射伤害），禁止雷电天气充电。
- 本产品禁止儿童独自使用，不要让儿童在没有监管时为鼠标充电和清洁。
- 本产品回收标准按电池类回收处理，禁止与生活垃圾混合。

- Mouse, equipped with a built-in power management chip, automatic power saving when not in use for 2 minutes, power automatically shuts down when not in use for 8 minutes, it can be awakened by pressing any key.
- Bluetooth 5.2 is only compatible with Win8/Win10/Win11/Mac/Android5.1 operating systems. It supports IOS 13 version or higher of the system.
- For Windows 7 system, please use Bluetooth 3.0. The main difference between Bluetooth 3.0 and 5.2 is that 5.2 has a long range and a smaller coverage area. While 3.0 has a wider compatibility range.
- When the red light on the mouse scroll wheel flashes, the indicator light comes on, or when the mouse operates slowly, please pay attention promptly.
- Do not let the mouse enter any liquid or expose it to hot and humid conditions. The working temperature range is from -10°C to 40°C.
- Do not disassemble, modify or repair this product. It may cause radiation harm. Do not charge during thunderstorm weather.
- This product is prohibited for children to use alone. Do not allow children to charge the mouse without supervision. And for cleaning.
- This product is subject to battery-type recycling standards for disposal. It is prohibited from being mixed with household garbage.